T10 pitch truly endless Polyurethane timing belts with steel reinforced cords. Standard T profile to DIN 7721 in metric pitch with trapezoidal toothform. Double sided toothed versions are available in a limited range.

Standard Stock Belt Widths			
16mm	25mm	32mm	50mm

Belt Length (mm)	Number of Teeth	Double Sided Belt (DL) Available
260	26	✓
350	35	
370	37	
400	40	
410	41	
420	42	
440	44	
450	45	
500	50	
530	53	✓
560	56	
600	60	
610	61	
630	63	✓
660	66	✓
680	68	
690	69	
700	70	
720	72	✓
730	73	
750	75	
760	76	
780	78	
810	81	
840	84	✓
850	85	
880	88	
890	89	
920	92	

Belt Length (mm)	Number of Teeth	Double Sided Belt (DL) Available
960	96	
970	97	
980	98	✓
1010	101	
1080	108	
1110	111	
1140	114	
1150	115	
1210	121	✓
1240	124	✓
1250	125	✓
1300	130	
1320	132	✓
1350	135	✓
1390	139	
1400	140	
1420	142	✓
1450	145	
1460	146	
1500	150	
1560	156	
1610	161	✓
1750	175	
1780	178	
1880	188	✓
1960	196	
2250	225	
3100	310	
4780	478	✓

These belts have the following features:

Mechanical features:
Consistent dimensional stability.
Low pre-tension.
Low noise.
High abrasion resistance.
Low maintenence.
High flexibility.
Linear speeds up to 80 m/sec.

Chemical features:
Good resistance to aging, hydrolysis, UVA rays, Ozone.
Working tempurature: -25°C to +80°C (up to +110°C for short periods).
High resistance to oils, fats and greases.
Good resistance to most acids and alkalis.

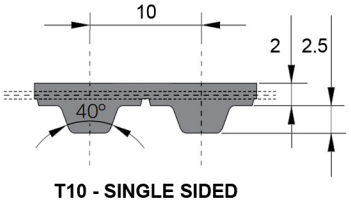

T10 - SINGLE SIDED

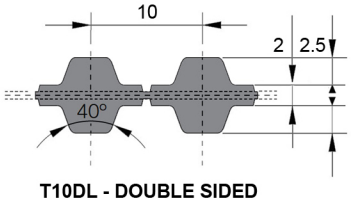

T10DL - DOUBLE SIDED